

# **MCNL / MCNR SSL series Splice and termination cabinet**



## **Description:**

The MCNR / MCNL series are an economical 19" rack mountable splice&termination cabinet with reduced depth for use with splicing of manufactured pigtails, preterminated cables and field-installable connectors. The cables are strain-relieved at the rear of the unit.

MCNR - Right side / MCNL - Left side pivoting shelf can be equipped with either a splice tray holder or bend radius protection which guides, stores and organizes excess slack. This prevents damage to fibers prior to routing into couplings. The MCNR is used in installations where space is limited.



#### **Features:**


- Premium Aluminum material ENAW 5005 H14
- Environmental friendly no powder color
- Luxury Stainless Steel Look (SSL)
- Anti-fingerprint, extra-low height, non-corrosive
- Anti-static and non-conductive material, long lifetime
- Splicing and termination optical cable in one box
- Angled adaptor montage
- Front lockable hinged door protects outgoing patchcords against damage
- Reduced depth to 260 mm for low depth rack installation
- Pivoting shelf eases connector routing and cable routing
- Cable entrance with strain relief
- Splice cassette holder enables cable termination with the help of pigtail splicing

### **Technical specifications:**

PART NUMBER	FIBER CAPACITY <sup>1</sup>	Max. cassette capacity	Height	DIMENSIONS (H x W x D) mm
MCNX-1	12	1	1U (45 mm)	45x432x240
MCNX-2	48	4	2U (88 mm)	88x432x240
MCNX-3	96	8	3U (133 mm)	133x432x240

Note: 1) capacity mentioned for standard adaptors, for SFF adaptors (LC) capacity can be doubled, but with respect to maximal splicing cassettes capacity limitation, depending on heat shrink tubes type used

## **Ordering Code:**

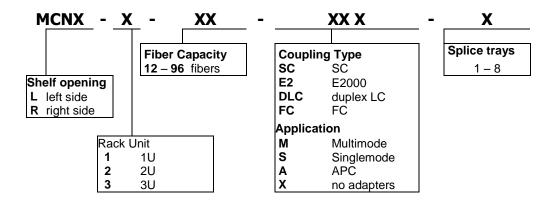

CMS 02-16 FN