


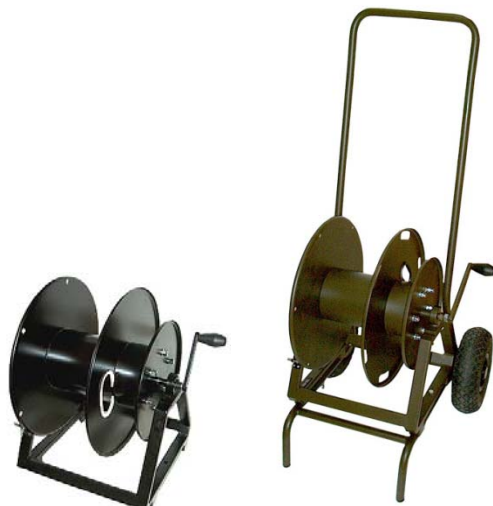


Cable Drums

Description:

OPTOKON offers complimentary high quality deployable cable drums. Users can select the appropriate design and style for their particular application. The drums are ideally suited to Military, Industrial, Broadcast and pro Audio applications. All drums are supplied with a third flange allowing full access to each end of the cable assembly.


The drums are delivered in standard black color RAL 9005 mat. Other - green khaki RAL 6014 mat color is available upon request¹.

<p>BBD-200, BBD-500NR, BBD-1000 -(6014¹)</p> <p>Heavy duty drum with direct crank rewind permanently attached to the axle. Designed for installation on military vehicle or TBD-500 type trolley suitable for mobile applications.</p>	 <p>BBD-500NR TBD-500NR-6014</p>
<p>TBD-200, TBD-500NR -(6014¹)</p> <p>Trolley drum with one-piece foot, rubber tyres and removable steel handlebars for long term shipping and storage. Large wheel diameter allows easy field operations.</p>	
<p>SBD-200 -(6014¹)</p> <p>Small, lightweight and durable design for quick and easy use, ideal for applications where 200 m lengths of cable are deployed out over large areas.</p>	 <p>SBD-200-6014</p>
<p>MBD-200, MBD-500 -(6014¹)</p> <p>These reels are stackable for maximum transport and storage efficiency, rugged steel construction throughout, including square tubular frame.</p>	 <p>MBD-500</p>
<p>RBD-200, RBD-500 -(6014¹)</p> <p>Mobile drum, with strap belts for shoulder wear. Suitable for use in the field. Weight with HMA connectors 200 m cable is 15 kg. The drum is available in two versions, for 200 m and 500 m of 5.5 mm tactical cable.</p>	 <p>RBD-200-6014 RBD-500</p>

BBD-200, BBD-500NR, BBD-1000

The same dimensions of 200 and 500 m types, they differ with delivered cable length. The drum contains BBD-200 cable 200 m length. The drum BBD-500NR is delivered with 500 m cable diameter 6 mm. Type BBD-1000² is wider and delivered with 1 km cable diameter 5.5 mm.
Weight: BBD-500NR: 11.4 kg, BBD-1000: 13.3 kg


Reel Dimensions BBD-200, BBD-500, BBD-1000 ¹							
A ¹	B ¹	C	D	E	F ¹	G	H
360	210	140	335	405	470	480	280

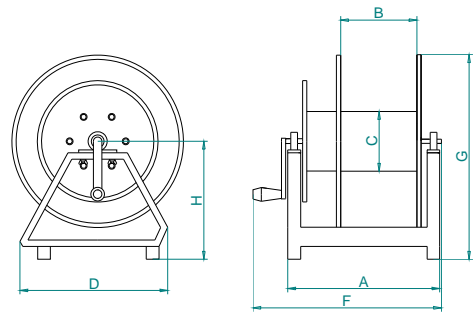

TBD-200, TBD-500NR

The BBD drum is installed on a mobile chassis.
Weight: TBD-500NR: 23 kg


Reel Dimensions TBD-200, TBD-500NR							
A	B	C	D	E	F	G	H
460	210	140	450	405	490	1090	380

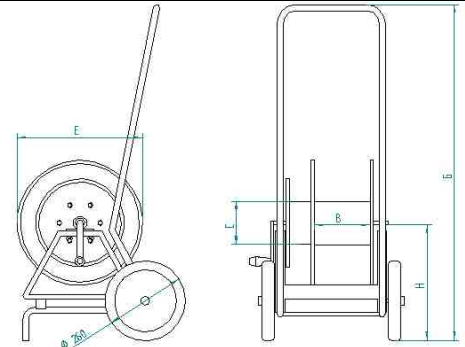

SBD-200

For a typical cable diameter of 5.5 mm, the SBD drum will accept 250 m of cable.
Weight: SBD-200: 6.2 kg

Reel Dimensions SBD-200						
B	C	D	E	F	G	H
200	110	325	305	300	390	30

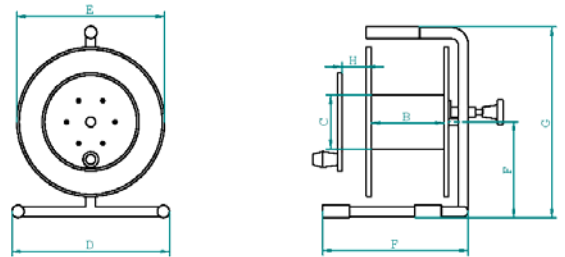


MBD-200, MBD-500

Two different drums dimensions.
The MBD-200 drum will accept 200 m, the MBD-500 up to 500 m cable of 5.5 mm diameter.
Weight: MBD-200: 8.0 kg, MBD-500: 10.8 kg

Reel Dimensions MBD-200							
A	B	C	D	E	F	G	H
290	200	110	375	305	385	370	185

Reel Dimensions MBD-500							
A	B	C	D	E	F	G	H
340	210	140	465	405	450	470	235

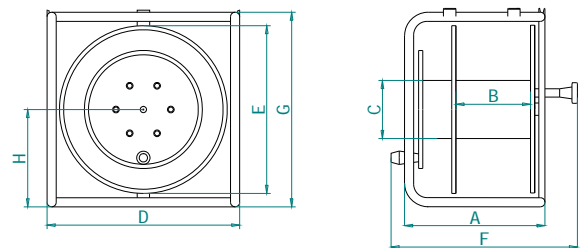


RBD-200, RBD-500

For a typical cable diameter of 5.5 mm, the RBD drum will accept 200 m, the RBD-500 up to 500 m of cable.
Weight: RBD-200: 9.7 kg, RBD-500: 10.7 kg

Reel Dimensions RBD-200							
A	B	C	D	E	F	G	H
-	200	110	310	305	360	570	-

Reel Dimensions RBD-500							
A	B	C	D	E	F	G	H
-	325	110	320	305	430	570	-

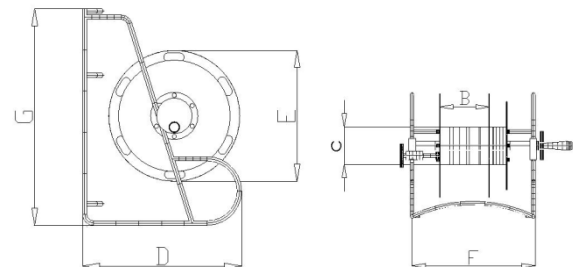

- Note: 1) Standard black color RAL 9005 mat.
Use code -6014 if green khaki RAL 6014 mat color is required.
2) BBD-1000 is wider, each dimension targeting to width is 210 mm larger.